

E-number: 7503985

Description

Barcode:	7330139280862
Series:	Pallas

Photometric data

Rated luminous flux (lm):	2400
Min luminous flux (lm):	2400
Max luminous flux (lm):	2400
Luminaire efficacy (lm/W):	109
Max. system power (W):	22
Light source:	LED exchangeable
Light source included:	Yes
Min colour temperature (K):	3000
Max colour temperature (K):	3000
Colour rendering index CRI:	80-89
Light sharing:	Symmetric
Light outlet:	Direct
Lumen median 50000h (tq):	90
Lumen median 75000h (tq):	85
Lumen median 100000h (tq):	80
Failure rate median 75000h:	85

Technical data

Spänning, nominell (V):	230
Min nominal voltage (V):	230
Max nominal voltage (V):	230
Voltage type:	AC
Frequency (Hz):	50
Type of control gear:	LED operating device current-controlled
With control gear:	Yes
Control gear manufacturer:	Class II
Min nominal current (mA):	300
Max nominal voltage (V):	230

Control

With movement sensor:	TRUE
-----------------------	------

Materials and environmental data



Housing material:	Plastic
Housing colour:	White
Material cover:	Plastic, opal
Country of origin:	SE

Connection and installation

Protection class:	II
Impact strength (IK):	IK10
Suitable surface mounting:	Yes
Min ambient temperature:	-20
Max ambient temperature:	35
D-marked (EN 60598-2-24):	Yes
Cover w/ insulation possible:	Yes
Fuse B10 (st):	62
Fuse B16 (st):	99
Fuse C10 (st):	62
Fuse C16 (st):	99

Dimensions and weight

Height/depth (mm):	120
Weight armature (kg):	1.3
Length/depth package (mm):	410
Width package (mm):	401
Height package (mm):	130
Weight package (kg):	1.6
Number in FP:	1

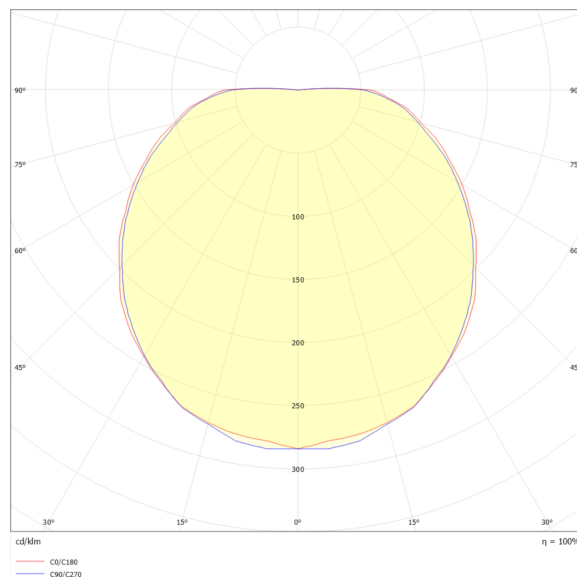

Do you need support?

offert@exaktor.se

0370-69 07 20

exaktor.com/en

exakt®