

HUGIN DT L120 840 HO

E-number: 7020133

Description

Barcode:	7330139120571
Series:	Hugin

Photometric data

Rated luminous flux (lm):	6000
Min luminous flux (lm):	6000
Max luminous flux (lm):	6000
Luminaire efficacy (lm/W):	111
Max. system power (W):	54
Light source:	LED exchangeable
Light source included:	Yes
Min colour temperature (K):	4000
Max colour temperature (K):	4000
Colour rendering index CRI:	80-89
Colour consistency:	SDCM3
Light sharing:	Symmetric
Light distributor:	Diffuser lens/optic/panel
Light outlet:	Direct
Suitable for monitor:	Yes
Lumen median 50000h (tq):	90
Lumen median 75000h (tq):	85
Lumen median 100000h (tq):	80
Failure rate median 75000h:	85
Energy efficiency class:	D

Technical data

Spänning, nominell (V):	230
Min nominal voltage (V):	220
Max nominal voltage (V):	240
Voltage type:	AC
Frequency (Hz):	50
Type of control gear:	LED operating device current-controlled
With control gear:	Yes
Control gear manufacturer:	Constant Current 300mA
Max nominal voltage (V):	240

Control

Operation by Bluetooth:	No
With movement sensor:	False

Materials and environmental data



Housing material:	Steel
Housing colour:	White
Material cover:	Plastic, opal
Country of origin:	SE
Surface protection housing:	Pulverlackerad

Connection and installation

Degree of protection (IP):	IP20
Protection class:	I
Min ambient temperature:	-20
Max ambient temperature:	35
Type of wiring:	Ending
Fuse B10 (st):	18
Fuse B16 (st):	30
Fuse C10 (st):	30
Fuse C16 (st):	51

Dimensions and weight

Length (mm):	1195
Width (mm):	128
Height/depth (mm):	73
Weight armature (kg):	3.32
Length/depth package (mm):	1205
Width package (mm):	165
Height package (mm):	95
Weight package (kg):	3.4
Number in FP:	1

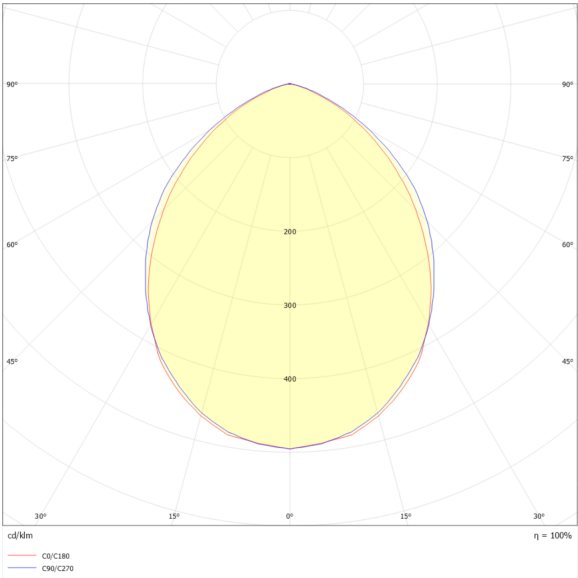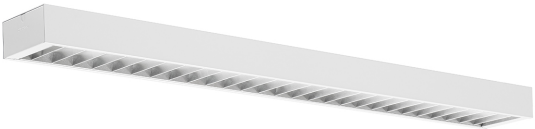

Do you need support?

offert@exaktor.se

0370-69 07 20

exaktor.com/en

