

ANUBIS TAVLA 50W/830 DALI

E-number: 7011587

Description

Barcode:	7330139600219
Series:	Anubis

Photometric data

Rated luminous flux (lm):	4410.0
Max. system power (W):	46
Light source:	LED exchangeable
Lamp holder:	Other
Light source included:	Yes
Min colour temperature (K):	3000
Max colour temperature (K):	3000
Light sharing:	Symmetric
Light outlet:	Direct
Lumen median 50000h (t ₉₀):	85
Energy efficiency class:	C

Technical data

Spänning, nominell (V):	230
Min nominal voltage (V):	230
Max nominal voltage (V):	230
Voltage type:	AC
Frequency (Hz):	50
Type of control gear:	LED operating device current-controlled
With control gear:	Yes
Control gear, type:	SELV, Constant Current
Max nominal voltage (V):	230

Control

Dimming DALI:	Yes
With movement sensor:	False

Materials and environmental data


Housing material:	Steel
Housing colour:	White
Material cover:	Without cover
Country of origin:	SE
Surface protection housing:	Pulverlackerad

Connection and installation

Degree of protection (IP):	IP20
Protection class:	I
Impact strength (IK):	IK00
Max ambient temperature:	35
Cover w/ insulation possible:	Yes
Fuse B10 (st):	15
Fuse B16 (st):	16
Fuse C10 (st):	24
Fuse C16 (st):	40

Dimensions and weight

Length (mm):	1835
Width (mm):	94
Height/depth (mm):	49
Weight armature (kg):	3.6
Length/depth package (mm):	1835
Width package (mm):	110
Height package (mm):	50
Weight package (kg):	3.7

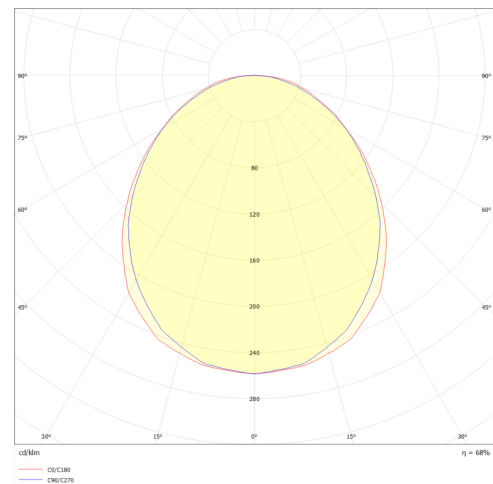

Do you need support?

offert@exaktor.se

0370-69 07 20

exaktor.com/en

exaktor