

YMIR G2 BAS 4" 840

E-number: 7468889

Description

Barcode:	7330139190956
Series:	Ymir

CRI>80

Photometric data

Rated luminous flux (lm):	1000
Min luminous flux (lm):	1000
Max luminous flux (lm):	1000
Luminaire efficacy (lm/W):	100
Max. system power (W):	10
Light source:	LED not exchangeable
Light source included:	Yes
Min colour temperature (K):	4000
Max colour temperature (K):	4000
Colour rendering index CRI:	80-89
Colour consistency:	SDCM4
Light sharing:	Symmetric
Light distributor:	Other
Light outlet:	Direct
Lumen median 50000h (tq):	90
Lumen median 100000h (tq):	80

Technical data

Spänning, nominell (V):	230
Min nominal voltage (V):	230
Max nominal voltage (V):	230
Voltage type:	AC
Frequency (Hz):	50
Type of control gear:	LED operating device current-controlled
With control gear:	Yes
Control gear manufacturer:	SELV, Constant Current
Max nominal voltage (V):	230

Control

With movement sensor:	False
-----------------------	-------

Materials and environmental data


Housing material:	Aluminium
Housing colour:	White
Material cover:	Plastic, opal
Country of origin:	SE

Connection and installation

Protection class:	III
Suitable built-in mounting:	Yes
Built-in height/depth (mm):	59
Min built-in diameter (mm):	108
Max built-in diameter (mm):	110
Min ambient temperature:	-20
Max ambient temperature:	30
Type of wiring:	Ending

Dimensions and weight

Height/depth (mm):	59
Weight armature (kg):	0.4
Length/depth package (mm):	156
Width package (mm):	156
Height package (mm):	100
Weight package (kg):	0.4
Number in FP:	1

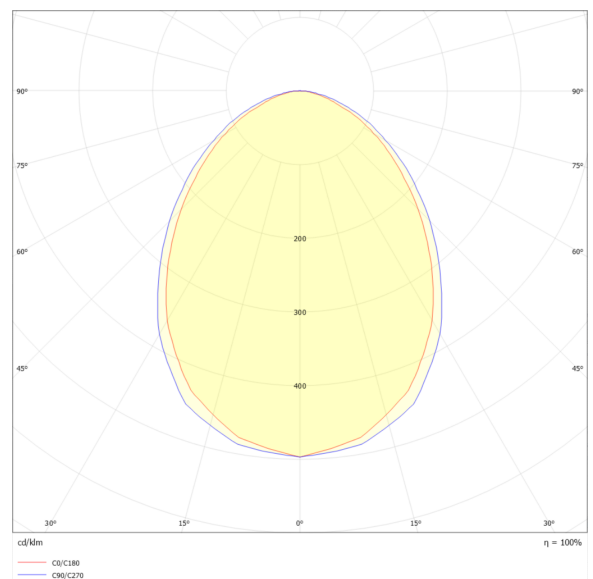

Do you need support?

offert@exaktor.se

0370-69 07 20

exaktor.com/en

exaktor