

ISA 400 DIM 3-4K

E-number: 7511170

Description

Barcode:	7330139295552
Series:	Isa

Photometric data

Rated luminous flux (lm):	4100
Min luminous flux (lm):	2600
Max luminous flux (lm):	4100
Luminaire efficacy (lm/W):	128
Max. system power (W):	32
Light source:	LED exchangeable
Light source included:	Yes
Min colour temperature (K):	3000
Max colour temperature (K):	4000
Colour rendering index CRI:	80-89
Colour consistency:	SDCM3
Light sharing:	Symmetric
Light distributor:	Other
Light outlet:	Direct
Lumen median 50000h (tq):	90
Lumen median 75000h (tq):	86
Failure rate median 75000h:	86
Flickering value Pst LM:	1
Energy efficiency class:	D

Technical data

Spänning, nominell (V):	230
Min nominal voltage (V):	220
Max nominal voltage (V):	240
Voltage type:	AC
Frequency (Hz):	50
Type of control gear:	LED operating device current-controlled
With control gear:	Yes
Min nominal current (mA):	200
Max nominal voltage (V):	240
Power factor:	0.94

Control

Operation by Bluetooth:	No
Dimming phase cut-off:	Yes
With movement sensor:	False

Materials and environmental data

Housing material:	Plastic
Housing colour:	White
Material cover:	Plastic, opal
Country of origin:	CN


Connection and installation

Degree of protection (IP):	IP54
Protection class:	II
Suitable surface mounting:	Yes
Suitable for wall mounting:	Yes
Suitable suspended mounting:	Yes
Min ambient temperature:	-20
Max ambient temperature:	40
Type of wiring:	Suitable for through wiring
Fuse B10 (st):	16
Fuse B16 (st):	26
Fuse C10 (st):	16
Fuse C16 (st):	26

Dimensions and weight

Height/depth (mm):	60
Weight armature (kg):	1.5
Length/depth package (mm):	406
Width package (mm):	406
Height package (mm):	70
Weight package (kg):	1.6
Number in FP:	1
Number per pallet:	48



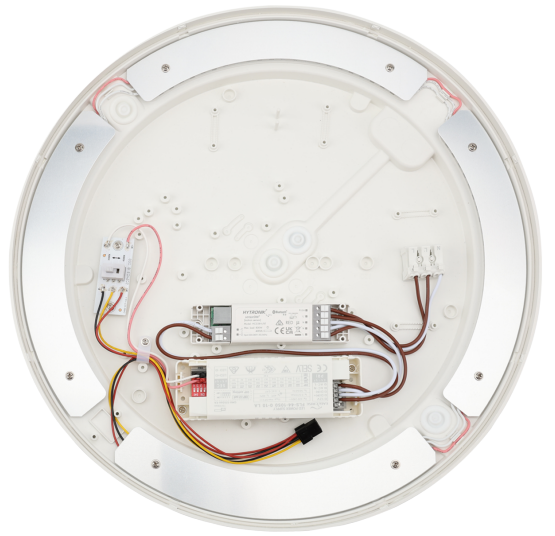

Do you need support?

offert@exaktor.se

0370-69 07 20

exaktor.com/en

exaktor