

POP Li44 L600 FLEX RS

E-number: 7219940

Description

Barcode:	7330139295514
Series:	POP

Photometric data

Rated luminous flux (lm):	3200
Min luminous flux (lm):	1800
Max luminous flux (lm):	3200
Luminaire efficacy (lm/W):	132
Max. system power (W):	25
Light source:	LED exchangeable
Light source included:	Yes
Min colour temperature (K):	3000
Max colour temperature (K):	4000
Colour rendering index CRI:	80-89
Colour consistency:	SDCM3
Beam angle (°):	120
Light sharing:	Symmetric
Light distributor:	Other
Light outlet:	Direct
Lumen median 50000h (tq):	91
Lumen median 75000h (tq):	87
Lumen median 100000h (tq):	83
Failure rate median 50000h:	10
Failure rate median 75000h:	87
Failure rate median 100000h:	20
Flickering value Pst LM:	1
Energy efficiency class:	D
Nominal lifetime L70/B50 at 25 °C (h):	100000.00

Technical data

Spänning, nominell (V):	230
Min nominal voltage (V):	220
Max nominal voltage (V):	240
Voltage type:	AC
Type of control gear:	LED operating device current-controlled
With control gear:	Yes
Min nominal current (mA):	114
Max nominal voltage (V):	240
Power factor:	0.97

Control

Operation by Bluetooth:	No
With movement sensor:	TRUE
With light sensor:	Yes

Materials and environmental data

Housing material:	Steel
Housing colour:	White
Material cover:	Plastic, opal
Country of origin:	CN
Surface protection housing:	Pulverlackerad



Connection and installation

Degree of protection (IP):	IP44
Protection class:	I
Impact strength (IK):	IK06
Suitable surface mounting:	Yes
Suitable for wall mounting:	Yes
Min ambient temperature:	-20
Max ambient temperature:	35
Type of wiring:	Suitable for through wiring
Fuse B10 (st):	37
Fuse B16 (st):	59
Fuse C10 (st):	37
Fuse C16 (st):	59

Dimensions and weight

Length (mm):	600
Width (mm):	167
Height/depth (mm):	47
Weight armature (kg):	1.32
Length/depth package (mm):	620

Width package (mm):	170
Height package (mm):	55
Weight package (kg):	1.47
Number per pallet:	108

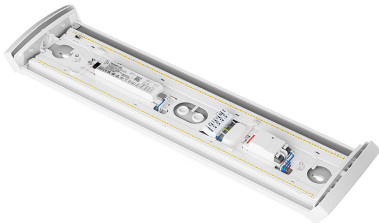

Do you need support?

offert@exaktor.se

0370-69 07 20

exaktor.com/en

