

ZENIT 60 L1200 840 GALLER

E-number: 7214012

Description

Barcode:	7330139440440
Series:	Zenit

Photometric data

Rated luminous flux (lm):	12000
Min luminous flux (lm):	12000
Max luminous flux (lm):	12000
Luminaire efficacy (lm/W):	122
Max. system power (W):	98
Light source:	LED exchangeable
Light source included:	Yes
Min colour temperature (K):	4000
Max colour temperature (K):	4000
Colour rendering index CRI:	80-89
Light sharing:	Double asymmetric
Light distributor:	Diffuser lens/optic/panel
Light outlet:	Direct
Lumen median 50000h (tq):	90
Lumen median 75000h (tq):	85
Lumen median 100000h (tq):	80
Failure rate median 75000h:	85
Energy efficiency class:	D

Technical data

Spänning, nominell (V):	230
Min nominal voltage (V):	230
Max nominal voltage (V):	230
Voltage type:	AC
Frequency (Hz):	50
Type of control gear:	LED operating device current-controlled
With control gear:	Yes
Control gear manufacturer:	Constant Current 0.5A
Max nominal voltage (V):	230
Power factor:	0.98

Control

With movement sensor:	False
-----------------------	-------

Materials and environmental data


Housing material:	Aluminium
Housing colour:	Aluminium
Material cover:	Plastic, transparent
Country of origin:	SE

Connection and installation

Degree of protection (IP):	IP23
Protection class:	I
Impact strength (IK):	IK04
Suitable surface mounting:	Yes
Min ambient temperature:	-20
Max ambient temperature:	45
Fuse B10 (st):	8
Fuse B16 (st):	13
Fuse C10 (st):	13
Fuse C16 (st):	22

Dimensions and weight

Length (mm):	1198
Width (mm):	124
Height/depth (mm):	90
Weight armature (kg):	2.7
Length/depth package (mm):	1200
Width package (mm):	145
Height package (mm):	100
Weight package (kg):	2.7

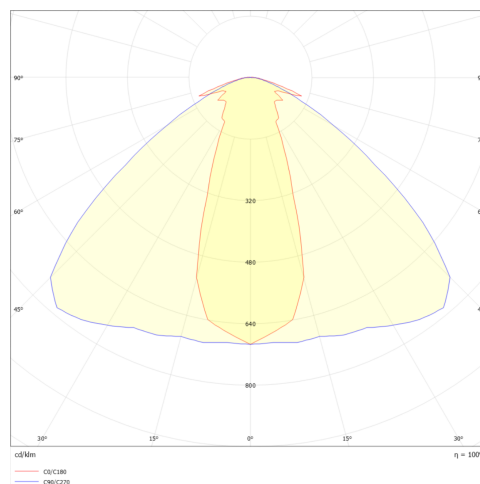

Do you need support?

offert@exaktor.se

0370-69 07 20

exaktor.com/en

exaktor