

COBRA MID L1372 840 DALI RS

E-number: 7212593

Description

Barcode:	7330139550354
Series:	Cobra

Photometric data

Rated luminous flux (lm):	7526
Min luminous flux (lm):	7526
Max luminous flux (lm):	7526
Luminaire efficacy (lm/W):	100
Max. system power (W):	75
Light source:	LED exchangeable
Light source included:	Yes
Min colour temperature (K):	4000
Max colour temperature (K):	4000
Colour rendering index CRI:	80-89
Light sharing:	Symmetric
Light outlet:	Direct
Lumen median 50000h (tq):	90
Lumen median 75000h (tq):	85
Lumen median 100000h (tq):	80
Failure rate median 75000h:	85
Energy efficiency class:	D

Technical data

Spänning, nominell (V):	230
Min nominal voltage (V):	230
Max nominal voltage (V):	230
Voltage type:	AC
Frequency (Hz):	50
Type of control gear:	LED operating device current-controlled
With control gear:	Yes
Control gear, type:	SELV 48V, Constant Current
Max nominal voltage (V):	230

Control

Dimming DALI:	Yes
With movement sensor:	Nej

Materials and environmental data


Housing material:	Aluminium
Housing colour:	Grey
Material cover:	Plastic, opal
Country of origin:	SE

Connection and installation

Degree of protection (IP), front side:	IP67
Degree of protection (IP), rear side:	IP67
Protection class:	I
Impact strength (IK):	IK09
Min ambient temperature:	-20
Max ambient temperature:	35
D-marked (EN 60598-2-24):	Yes
Cover w/ insulation possible:	Yes
Fuse B10 (st):	8
Fuse B16 (st):	13
Fuse C10 (st):	14
Fuse C16 (st):	22

Dimensions and weight

Length (mm):	1372
Width (mm):	185
Height/depth (mm):	85
Weight armature (kg):	5.7
Length/depth package (mm):	1380
Width package (mm):	200
Height package (mm):	90
Weight package (kg):	5.9

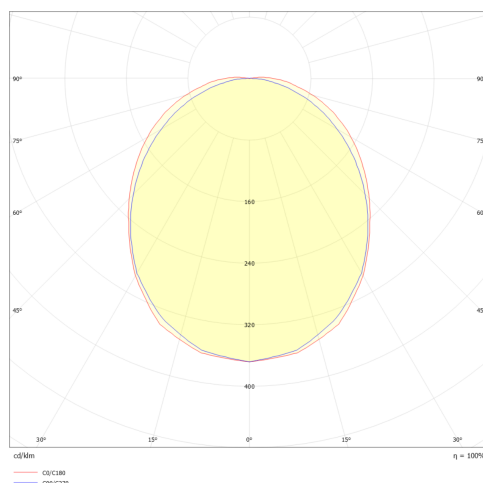

Do you need support?

offert@exaktor.se

0370-69 07 20

exaktor.com/en

exaktor