

# exFlood 120/840 AS10 Sv

E-number: 7764372

## Description

Barcode:	7330139295163
Series:	exFlood

## Photometric data

Rated luminous flux (lm):	16200
Min luminous flux (lm):	16200
Max luminous flux (lm):	16200
Luminaire efficacy (lm/W):	135
Max. system power (W):	120
Light source:	LED not exchangeable
Light source included:	Yes
Min colour temperature (K):	4000
Max colour temperature (K):	4000
Colour rendering index CRI:	80-89
Colour consistency:	SDCM5
Light sharing:	Asymmetric
Light distributor:	Diffuser lens/optic/panel
Light outlet:	Direct
Lumen median 100000h (tq):	84
Nominal lifetime L70/B50 at 25 °C (h):	100000.00

## Technical data

Spänning, nominell (V):	230
Min nominal voltage (V):	100
Max nominal voltage (V):	240
Voltage type:	AC
Frequency (Hz):	50
Type of control gear:	LED operating device current-controlled
With control gear:	Yes
Control gear, type:	SELV, Constant Current
Max nominal voltage (V):	240
Power factor:	0.98

## Control

With movement sensor:	False
-----------------------	-------

## Materials and environmental data



Housing material:	Aluminium
Housing colour:	Black
Material cover:	Glass transparent
Country of origin:	SE

## Connection and installation

Degree of protection (IP):	IP65
Protection class:	I
Impact strength (IK):	IK08
Min ambient temperature:	-30
Max ambient temperature:	45
D-marked (EN 60598-2-24):	Yes
Cover w/ insulation possible:	Yes
Type of wiring:	Ending
Fuse B10 (st):	3
Fuse B16 (st):	4
Fuse C10 (st):	5
Fuse C16 (st):	8

## Dimensions and weight

Length (mm):	366
Width (mm):	413
Height/depth (mm):	83
Weight armature (kg):	6.5
Length/depth package (mm):	490
Width package (mm):	420
Height package (mm):	140
Weight package (kg):	6.5

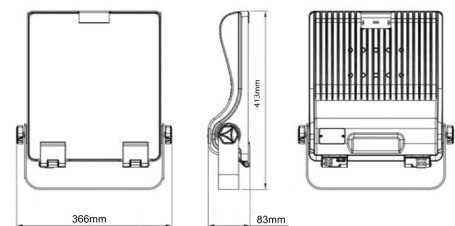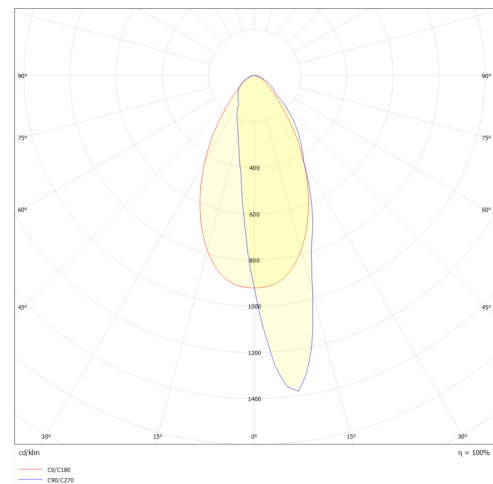

Do you need support?

offert@exaktor.se

0370-69 07 20

exaktor.com/en

exakt<sup>o</sup>r