

# NAIAD G4 L12 3K ÖK

E-number: 7220366

## Description

Barcode:	7330139253651
Series:	Naiad

## Photometric data

Max. system power (W):	44
Light source:	LED exchangeable
Lamp holder:	Other
Light source included:	Yes
Min colour temperature (K):	3000
Max colour temperature (K):	3000
Colour rendering index CRI:	80-89
Colour consistency:	SDCM3
Light sharing:	Symmetric
Light distributor:	None
Light outlet:	Direct
Lumen median 50000h (tq):	90
Lumen median 75000h (tq):	85
Lumen median 100000h (tq):	80
Failure rate median 50000h:	10
Failure rate median 75000h:	85
Failure rate median 100000h:	20
Flickering value Pst LM:	1

## Technical data

Spänning, nominell (V):	230
Min nominal voltage (V):	220
Max nominal voltage (V):	240
Voltage type:	AC
Frequency (Hz):	50
Type of control gear:	LED operating device current-controlled
With control gear:	Yes
Max nominal voltage (V):	240
Power factor:	0.93

## Control

Operation by Bluetooth:	No
-------------------------	----

## Materials and environmental data


Housing material:	Steel
Housing colour:	White
Material cover:	Plastic, structured
Country of origin:	SE
Surface protection housing:	Pulverlackerad

## Connection and installation

Degree of protection (IP):	IP44
Protection class:	I
Suitable surface mounting:	Yes
Suitable for wall mounting:	Yes
Min ambient temperature:	-20
Max ambient temperature:	35
Type of wiring:	Through wiring included
Fuse B16 (st):	30
Fuse C16 (st):	51

## Dimensions and weight

Length (mm):	1200
Width (mm):	159
Height/depth (mm):	54
Weight armature (kg):	2.7
Length/depth package (mm):	1220
Width package (mm):	175
Height package (mm):	60
Weight package (kg):	3

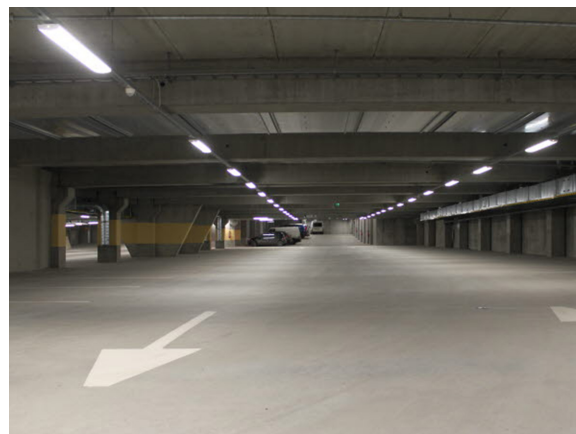

Do you need support?

[offert@exaktor.se](mailto:offert@exaktor.se)

0370-69 07 20

[exaktor.com/en](https://exaktor.com/en)

**exaktor**